

Gokin

470-500W



A

D

0.15%

1%

0.35%

CE

•


-40°C ~ +85°C

• Maximum Series Fuse Rating

Mechanical Parameters

Engineering Drawings

2

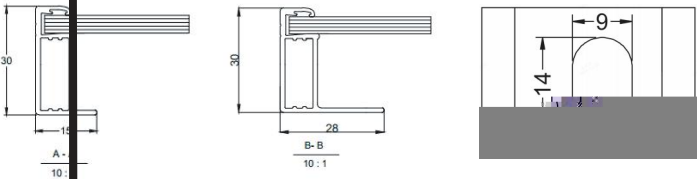

23.0

23.3

23.5

23.8

24.0

24.3

24.5