


	N GBC
	108 6×18
	2.0mm
	2.0mm
	TüV 1×4mm ² , (+)300mm, (-)200mm
	1800×1134×30mm
	MC4
	37 / 222 /20 888 /40 1036 /13.5 1332 /17.5
	Class II
	IEC Class C



	GK-3-54HGFD _b -480M		GK-3-54HGFD _b -485M		GK-3-54HGFD _b -490M		GK-3-54HGFD _b -495M		GK-3-54HGFD _b -500M
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC
P _{max} /W									
V _{oc} /V									
V _{mp} /V									
I _{sc} /A									
I _{mp} /A									
%	23.5		23.8		24.0		24.3		24.5

1、STC（标准测试环境）：辐照度1000W/M²，电池温度25℃，光谱AM1.5 2、NOCT（电池片标称工作温度条件）：辐照度800W/M²，环境温度20℃，光谱AM1.5

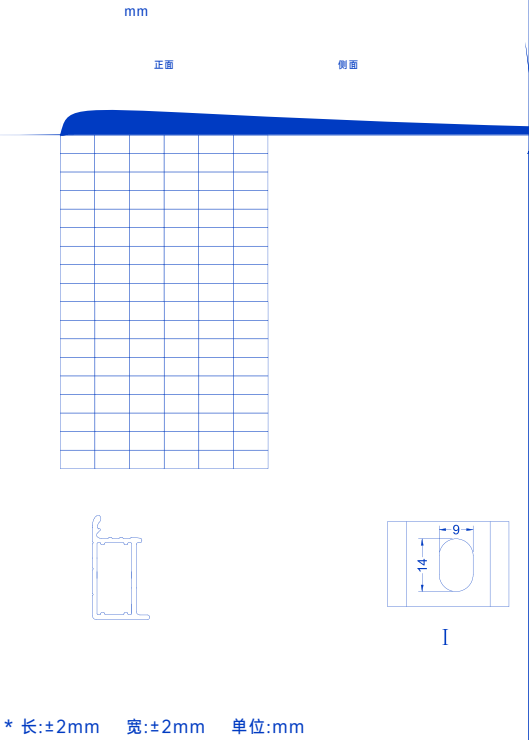