

# Gokin

# 470-475W



A

D

$\leq 1\%$

$\leq 0.35\%$





Product Warranty




Linear Power Warranty





- Operating Temperature **-40°C ~ +85°C**
  - T<sub>98</sub> max **70°C**
  - Junction Box **IP68**
  - NOCT **45±2°C**
  - Maximum Series Fuse Rating **30A**
  - Maximum System Voltage **1500V(IEC)**

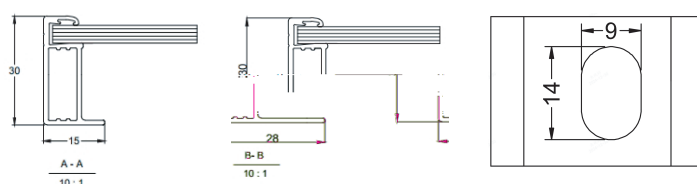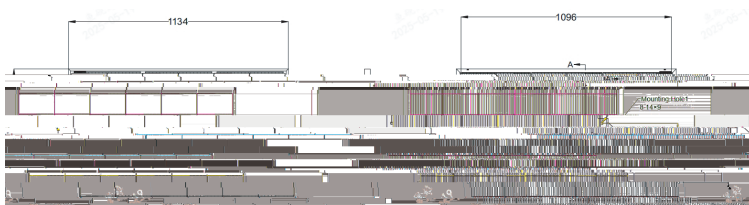[illegible]

|  |      |  |  |      |  |  |
|--|------|--|--|------|--|--|
|  |      |  |  |      |  |  |
|  |      |  |  |      |  |  |
|  |      |  |  |      |  |  |
|  |      |  |  |      |  |  |
|  |      |  |  |      |  |  |
|  |      |  |  |      |  |  |
|  |      |  |  |      |  |  |
|  |      |  |  |      |  |  |
|  | 23.6 |  |  | 23.8 |  |  |

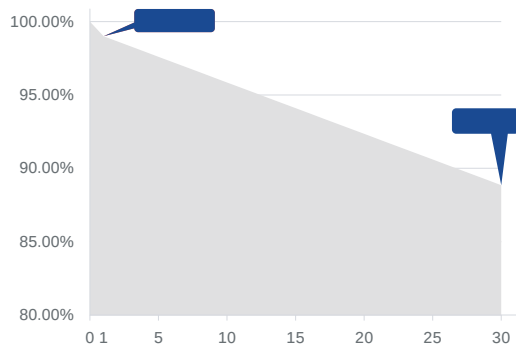

## Mechanical Test Load

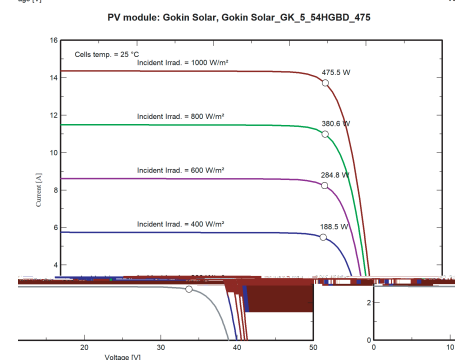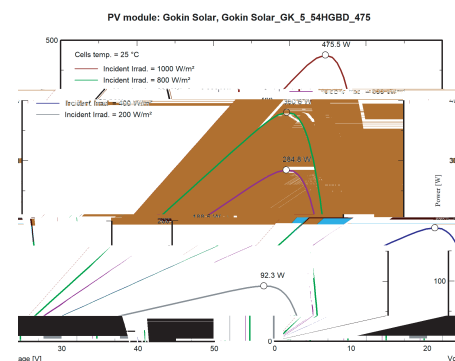

Cable type

Connector type