

Gokin

TOPCon Bifacial Module with Single Glass

GK-1-72HT-F | Half-cut | 144cells

570-600W

23.2%

≤1% First-year Degradation

≤0.4% Annual Degradation



High Efficiency



anti-degradation



Excellent Energy Yield



Quality Guarantee




15 Years



30 Years

**Linear Performance
Warranty**

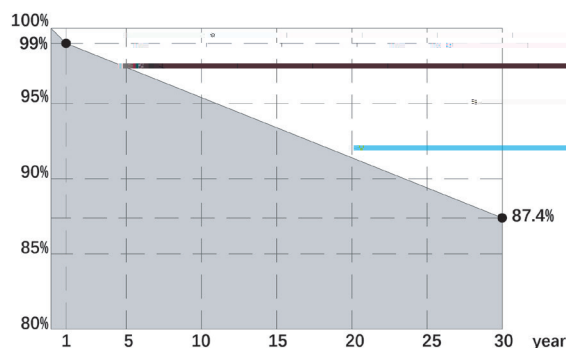


Dust and sand

Mechanical Parameters

	TÜV 2
Glass	

Engineering Drawings(mm)

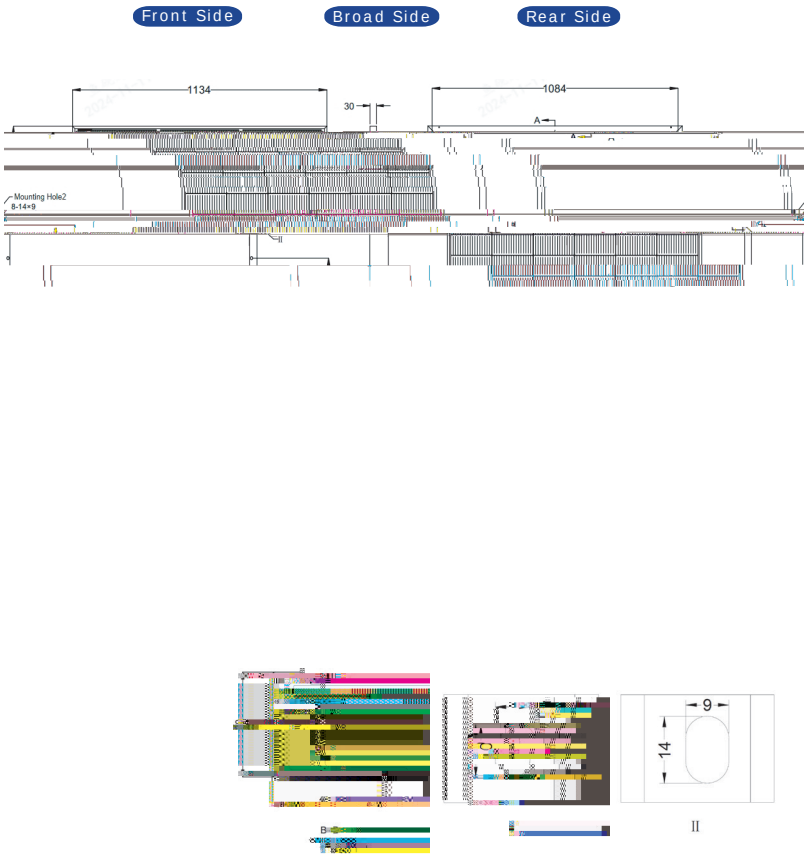

Mechanical Loading

Hailstone Test

Temperature Ratings (STC)

Electrical Characteristics ST 2 AM1.5

	GK-1-72HT-570M-F	GK-1-72HT-575M-F	GK-1-72HT-580M-F	GK-1-72HT-585M-F	GK-1-72HT-590M-F	GK-1-72HT-595M-F	GK-1-72HT-600M-F

· Maximum system voltage:1500V · Maximum series fuse rating:30A · J-Box:IP68

