

Gokin

Superior Temperature coefficient

Module Efficiency up to

0.35%

15
year

- Operating Temperature-40°C ~ +85°C
 - Maximum Series Fuse Rating25A
- Power Tolerance0~+3%
 - Maximum System Voltage1500V(IEC)
- Junction BoxIP68
- NOCT45±2°C

Mechanical Parameters

Engineering Drawings

108 6×18

TüV 1×4mm2

24.8kg (54.67lbs)

1800×1134×30mm


MC4 Compatible/MC4-Evo2

37 pcs per pallet
222 pcs per 20' GP 888 pcs per 40' HC

Class II

IEC Class C

Electrical Characteristics (STC Test)

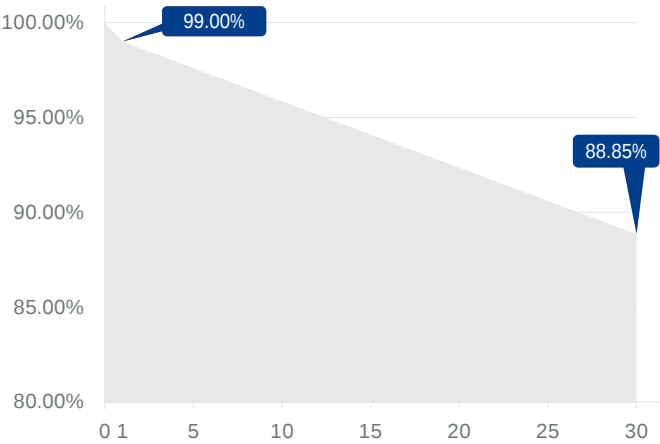

Temperature Ratings (STC)

Temperature Coefficient of Isc	+0.05%/
Temperature Coefficient of Voc	-0.22%/
Temperature Coefficient of Pmax	-0.26%/

Mechanical Loading

5400Pa
2400Pa
25 mm diameter hail at 23 m/s